




1952M

Metric Offset Combination Wrenches with Chrome Finish



PRODUCT DETAILS

- Open end angle 15° with a slimmer head for improved accessibility
- Ring end angle 15° for knuckle clearance or better grip
- 12-point Dynamic-Drive™ profile provides longer life for screws and nuts
- Chrome plated micro-matte finishing provides high quality surface
- High-performance alloy steel
- Standards: ISO 691, ISO 7738, ISO 3318, ISO 1711-1 and DIN 3113
- SB: Retail pack on a plastic info card

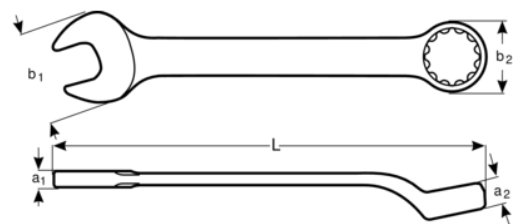

Follow the Fish!



PRODUCT ATTRIBUTES

Product		L	a1	a2	b1	b2	
1952M-6	6 mm	110 mm	3.8 mm	5.6 mm	16 mm	10.4 mm	15 g
1952M-7	7 mm	120 mm	4 mm	6.2 mm	18 mm	11.8 mm	20 g
1952M-8	8 mm	130 mm	4.2 mm	6.7 mm	20 mm	13.2 mm	29 g
1952M-9	9 mm	140 mm	4.4 mm	7.3 mm	22 mm	14.6 mm	35 g
1952M-10	10 mm	150 mm	4.6 mm	7.8 mm	24 mm	16 mm	45 g
1952M-11	11 mm	160 mm	4.8 mm	8.4 mm	26 mm	17.2 mm	52 g
1952M-12	12 mm	167 mm	5 mm	9 mm	28 mm	18.7 mm	65 g
1952M-13	13 mm	175 mm	5.4 mm	9.6 mm	30 mm	20 mm	77 g
1952M-14	14 mm	185 mm	5.8 mm	10.2 mm	32 mm	21.7 mm	85 g
1952M-15	15 mm	195 mm	6.2 mm	10.8 mm	34 mm	23 mm	110 g
1952M-16	16 mm	210 mm	6.6 mm	11.4 mm	36 mm	24.5 mm	125 g
1952M-17	17 mm	225 mm	7 mm	12 mm	38 mm	26 mm	144 g
1952M-18	18 mm	237 mm	7.4 mm	12.4 mm	40 mm	27.5 mm	180 g
1952M-19	19 mm	250 mm	7.8 mm	13 mm	42 mm	29 mm	201 g
1952M-20	20 mm	267 mm	8.2 mm	13.2 mm	44 mm	30.5 mm	240 g
1952M-21	21 mm	283 mm	8.6 mm	13.8 mm	46 mm	32 mm	268 g
1952M-22	22 mm	295 mm	9.1 mm	14.6 mm	48 mm	35 mm	300 g
1952M-23	23 mm	295 mm	9.1 mm	14.6 mm	48 mm	35 mm	300 g
1952M-24	24 mm	329 mm	9.4 mm	15.4 mm	52 mm	38 mm	375 g
1952M-25	25 mm	329 mm	9.4 mm	15.4 mm	52 mm	38 mm	375 g
1952M-26	26 mm	360 mm	10.2 mm	16.8 mm	58 mm	41.5 mm	510 g
1952M-27	27 mm	360 mm	10.2 mm	16.8 mm	58 mm	41.5 mm	510 g
1952M-28	28 mm	360 mm	10.2 mm	16.8 mm	58 mm	41.5 mm	510 g
1952M-29	29 mm	394 mm	11 mm	18.2 mm	64 mm	44.5 mm	650 g
1952M-30	30 mm	394 mm	11 mm	18.2 mm	64 mm	44.5 mm	650 g
1952M-32	32 mm	435 mm	11.8 mm	19.7 mm	66 mm	47.5 mm	820 g
1952M-34	34 mm	468 mm	12.6 mm	21.2 mm	76 mm	53 mm	1060 g
1952M-36	36 mm	468 mm	12.6 mm	21.2 mm	76 mm	53 mm	1060 g
1952M-41	41 mm	510 mm	13.6 mm	22.7 mm	86 mm	61 mm	1345 g
1952M-46	46 mm	520 mm	15.4 mm	25.4 mm	93.5 mm	67 mm	1750 g
1952M-50	50 mm	560 mm	16.3 mm	26.2 mm	104.4 mm	74.9 mm	2200 g
1952M-55	55 mm	570 mm	19.1 mm	28.6 mm	113.3 mm	82.7 mm	3200 g
1952M-60	60 mm	660 mm	20 mm	31 mm	123 mm	90 mm	3600 g
1952M-65	65 mm	710 mm	22 mm	33 mm	133 mm	98 mm	4500 g
1952M-70	70 mm	760 mm	24 mm	35 mm	143 mm	105 mm	5600 g
1952M-75	75 mm	810 mm	26 mm	38 mm	153 mm	110 mm	6780 g
1952M-80	80 mm	860 mm	28 mm	41 mm	163 mm	119 mm	8780 g
SB1952M-7	7 mm	120 mm	4 mm	6.2 mm	18 mm	11.8 mm	20 g
SB1952M-8	8 mm	130 mm	4.2 mm	6.7 mm	20 mm	13.2 mm	29 g
SB1952M-10	10 mm	150 mm	4.6 mm	7.8 mm	24 mm	16 mm	45 g
SB1952M-12	12 mm	167 mm	5 mm	9 mm	28 mm	18.7 mm	65 g
SB1952M-13	13 mm	175 mm	5.4 mm	9.6 mm	30 mm	20 mm	77 g
SB1952M-14	14 mm	185 mm	5.8 mm	10.2 mm	32 mm	21.7 mm	85 g
SB1952M-17	17 mm	225 mm	7 mm	12 mm	38 mm	26 mm	144 g
SB1952M-19	19 mm	250 mm	7.8 mm	13 mm	42 mm	29 mm	201 g
SB1952M-24	24 mm	329 mm	9.4 mm	15.4 mm	52 mm	38 mm	375 g

Follow the Fish!



Contact: info@bahco.com / www.bahco.com