




6700SZ

1/4" Square Drive Sockets with Imperial Hex Profile



PRODUCT DETAILS

- Knurled shank for finger turning of free running fasteners
- Not suitable for machine operation or power tools
- Highly polished finish
- High-performance alloy steel
- Less wear of fastener thanks to Dynamic-Drive™ profile
- Maximum load distribution and torque from the additional flank area
- Standards: ISO 2725/1174 and DIN 3124/3120
- SB: Retail pack on a plastic info card

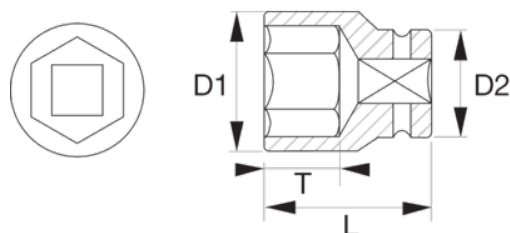

Follow the Fish!



PRODUCT ATTRIBUTES

Product		L	D1	D2	T	
6700SZ-1/8	1/8 in	24.7 mm	6.8 mm	11.9 mm	2.5 mm	9 g
6700SZ-5/32	5/32 in	24.7 mm	6.8 mm	11.9 mm	6.5 mm	9 g
6700SZ-3/16	3/16 in	24.7 mm	7.9 mm	11.9 mm	7.5 mm	10 g
6700SZ-7/32	7/32 in	24.7 mm	8.9 mm	11.9 mm	8 mm	10 g
6700SZ-1/4	1/4 in	24.7 mm	9.9 mm	11.9 mm	8 mm	11 g
6700SZ-9/32	9/32 in	24.7 mm	11 mm	11.9 mm	8 mm	12 g
6700SZ-5/16	5/16 in	24.7 mm	11.9 mm	11.9 mm	8 mm	12 g
6700SZ-11/32	11/32 in	24.7 mm	13 mm	12.4 mm	8 mm	13 g
6700SZ-3/8	3/8 in	24.7 mm	14.5 mm	13 mm	9 mm	16 g
6700SZ-7/16	7/16 in	24.7 mm	15.9 mm	14.1 mm	11.5 mm	16 g
6700SZ-1/2	1/2 in	24.7 mm	17.6 mm	15.2 mm	11.5 mm	23 g
6700SZ-9/16	9/16 in	24.7 mm	19.6 mm	16 mm	11.5 mm	29 g
SB6700SZ-1/8	1/8 in	24.7 mm	6.8 mm	11.9 mm	2.5 mm	9 g
SB6700SZ-5/32	5/32 in	24.7 mm	6.8 mm	11.9 mm	6.5 mm	9 g
SB6700SZ-3/16	3/16 in	24.7 mm	7.9 mm	11.9 mm	7.5 mm	10 g
SB6700SZ-7/32	7/32 in	24.7 mm	8.9 mm	11.9 mm	8 mm	10 g
SB6700SZ-1/4	1/4 in	24.7 mm	9.9 mm	11.9 mm	8 mm	11 g
SB6700SZ-9/32	9/32 in	24.7 mm	11 mm	11.9 mm	8 mm	12 g
SB6700SZ-5/16	5/16 in	24.7 mm	11.9 mm	11.9 mm	8 mm	12 g
SB6700SZ-11/32	11/32 in	24.7 mm	13 mm	12.4 mm	8 mm	13 g
SB6700SZ-3/8	3/8 in	24.7 mm	14.5 mm	13 mm	9 mm	16 g
SB6700SZ-7/16	7/16 in	24.7 mm	15.9 mm	14.1 mm	11.5 mm	16 g
SB6700SZ-1/2	1/2 in	24.7 mm	17.6 mm	15.2 mm	11.5 mm	23 g
SB6700SZ-9/16	9/16 in	24.7 mm	19.6 mm	16 mm	11.5 mm	29 g

Follow the Fish!

