




7800DZ

1/2" Square Drive Sockets with Imperial Bi-Hex Profile



PRODUCT DETAILS

- Knurled shank for finger turning of free running fasteners
- Not suitable for machine operation or power tools
- Highly polished finish
- High-performance alloy steel
- Less wear of the fastener thanks to Dynamic-Drive™ profile
- Maximum load distribution and torque from the additional flank area
- SB: retail packed on a plastic info card
- Standards: ISO 2725/1174 and DIN 3124/3120

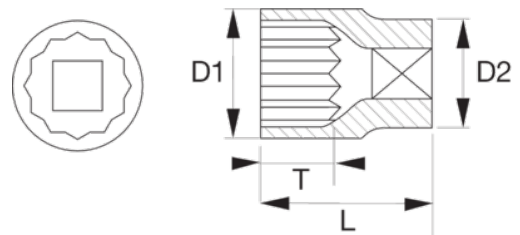

Follow the Fish!



PRODUCT ATTRIBUTES

Product		L	D1	D2	T	
7800DZ-5/16	5/16 in	38 mm	14.5 mm	22 mm	6.9 mm	40 g
7800DZ-11/32	11/32 in	38 mm	14.5 mm	22 mm	6.9 mm	40 g
7800DZ-3/8	3/8 in	38 mm	14.5 mm	22 mm	6.9 mm	41 g
7800DZ-13/32	13/32 in	38 mm	16.6 mm	22 mm	8.9 mm	45 g
7800DZ-7/16	7/16 in	38 mm	16.6 mm	22 mm	8.9 mm	46 g
7800DZ-1/2	1/2 in	38 mm	18.8 mm	22 mm	9.7 mm	60 g
7800DZ-9/16	9/16 in	38 mm	20.8 mm	22 mm	10.2 mm	53 g
7800DZ-19/32	19/32 in	38 mm	21.6 mm	22 mm	9.1 mm	90 g
7800DZ-5/8	5/8 in	38 mm	22.9 mm	22 mm	11.7 mm	65 g
7800DZ-11/16	11/16 in	38 mm	24.7 mm	23 mm	11.7 mm	75 g
7800DZ-3/4	3/4 in	38 mm	26.6 mm	24 mm	13.5 mm	80 g
7800DZ-25/32	25/32 in	38 mm	27.9 mm	24.5 mm	13.5 mm	85 g
7800DZ-13/16	13/16 in	38 mm	28.7 mm	25 mm	13.5 mm	92 g
7800DZ-7/8	7/8 in	39 mm	30.7 mm	25.5 mm	17.8 mm	99 g
7800DZ-15/16	15/16 in	41 mm	32.7 mm	26 mm	18.3 mm	120 g
7800DZ-1	1 in	42 mm	34.7 mm	27.5 mm	18.5 mm	139 g
7800DZ-1.1/16	1 1/16 in	44 mm	36.6 mm	29 mm	19.1 mm	170 g
7800DZ-1.1/8	1 1/8 in	46 mm	36 mm	29 mm	19.8 mm	190 g
7800DZ-1.3/16	1 3/16 in	44 mm	40.4 mm	35 mm	18.5 mm	230 g
7800DZ-1.1/4	1 1/4 in	47 mm	42.3 mm	30.5 mm	19.1 mm	185 g
7800DZ-1.5/16	1.5/16 in	48 mm	44.5 mm	40.2 mm	24.9 mm	280 g
7800DZ-1.3/8	1.3/8 in	48 mm	44.5 mm	40.2 mm	24.9 mm	280 g
7800DZ-1.7/16	1.7/16 in	48 mm	45 mm	41 mm	25 mm	285 g
7800DZ-1.1/2	1.1/2 in	48 mm	45.2 mm	43 mm	25.1 mm	290 g
SB7800DZ-5/16	5/16 in	38 mm	14.5 mm	22 mm	6.9 mm	40 g
SB7800DZ-11/32	11/32 in	38 mm	14.5 mm	22 mm	6.9 mm	40 g
SB7800DZ-3/8	3/8 in	38 mm	14.5 mm	22 mm	6.9 mm	60 g
SB7800DZ-13/32	13/32 in	38 mm	16.6 mm	22 mm	8.9 mm	45 g
SB7800DZ-7/16	7/16 in	38 mm	16.6 mm	22 mm	8.9 mm	46 g
SB7800DZ-1/2	1/2 in	38 mm	18.8 mm	22 mm	9.7 mm	51 g
SB7800DZ-9/16	9/16 in	38 mm	20.8 mm	22 mm	10.2 mm	70 g
SB7800DZ-19/32	19/32 in	38 mm	21.6 mm	22 mm	9.1 mm	56 g
SB7800DZ-5/8	5/8 in	38 mm	22.9 mm	22 mm	11.7 mm	65 g
SB7800DZ-11/16	11/16 in	38 mm	24.7 mm	23 mm	11.7 mm	75 g
SB7800DZ-3/4	3/4 in	38 mm	26.6 mm	24 mm	13.5 mm	80 g
SB7800DZ-25/32	25/32 in	38 mm	27.9 mm	24.5 mm	13.5 mm	85 g
SB7800DZ-13/16	13/16 in	39 mm	28.7 mm	25 mm	13.5 mm	92 g
SB7800DZ-7/8	7/8 in	39 mm	30.7 mm	25.5 mm	17.8 mm	99 g
SB7800DZ-15/16	15/16 in	41 mm	32.7 mm	26 mm	18.3 mm	120 g
SB7800DZ-1	1 in	42 mm	34.7 mm	27.5 mm	18.5 mm	130 g
SB7800DZ-1.1/16	1.1/16 in	44 mm	36.6 mm	29 mm	19.1 mm	142 g
SB7800DZ-1.1/8	1.1/8 in	46 mm	38.6 mm	29 mm	19.8 mm	190 g
SB7800DZ-1.3/16	1.3/16 in	47 mm	40.4 mm	29 mm	18.5 mm	240 g
SB7800DZ-1.1/4	1.1/4 in	47 mm	42.3 mm	30.5 mm	19.1 mm	185 g
SB7800DZ-1.5/16	1 5/16 in	48 mm	40.2 mm	44.5 mm	24.9 mm	280 g
SB7800DZ-1.3/8	1.3/8 in	48 mm	44.5 mm	40.2 mm	24.9 mm	280 g
SB7800DZ-1.7/16	1.7/16 in	48 mm	45 mm	41 mm	25 mm	285 g
SB7800DZ-1.1/2	1.1/2" in	48 mm	45 mm	41 mm	25 mm	285 g

Follow the Fish!



Contact: info@bahco.com / www.bahco.com