




4532

2-Arm Universal Pullers with Induction Hardened Spindle and Galvanized Finish



PRODUCT DETAILS

- Universal two-arm pullers
- Made of special steel
- Galvanised finish
- By reversing the arms, the extractor can be used internally or externally
- Strong design with large claw surfaces
- Body, arms and links are drop forged
- Wear-resistant, induction hardened spindles starting in size C
- 4532K Pair of spare arms
- 4532LK Pair of long spare arms
- 4532/S Spare spindle
- Large claw surfaces offer many advantages for careful and quick removal of pulleys, gears and ball bearings
- Externally-internally reversible by relocating arms
- Finish: Galvanised, with induction hardened spindle, from 4532-C, D, E, F, G and H
- Arms always grip parallel to each other

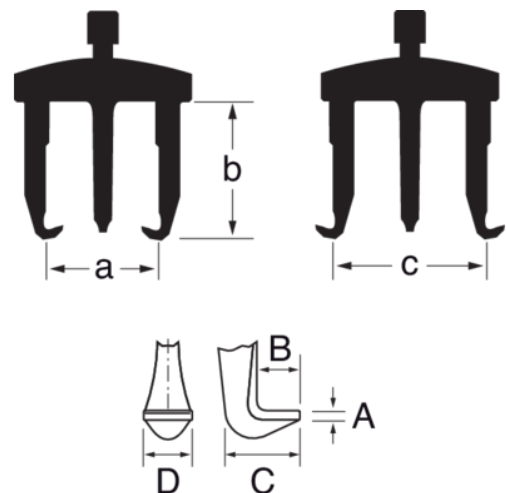

Follow the Fish!



PRODUCT ATTRIBUTES

Product: 4532-A

a	25-80 mm	b	100 mm	C	70-130 mm
	4.5 to		45 kN	A	3 mm
B	13 mm	C	25 mm	D	20 mm
	M14x1.5x135 mm		17 mm		1000 g

Product: 4532-AL

a	25-80 mm	b	200 mm	C	70-130 mm
	4.5 to		45 kN	A	3 mm
B	13 mm	C	25 mm	D	20 mm
	M14x1.5x135 mm		17 mm		1400 g

Product: 4532-B

a	25-130 mm	b	100 mm	C	80-180 mm
	4.5 to		45 kN	A	3 mm
B	13 mm	C	25 mm	D	20 mm
	M14x1.5x135 mm		17 mm		1220 g

Product: 4532-BL

a	25-130 mm	b	200 mm	C	80-180 mm
	4.5 to		45 kN	A	3 mm
B	13 mm	C	25 mm	D	20 mm
	M14x1.5x135 mm		17 mm		1590 g

Product: 4532-C

a	50-160 mm	b	150 mm	C	105-220 mm
	6.5 to		65 kN	A	4 mm
B	16 mm	C	35 mm	D	25 mm
	G 1/2"x14x210 mm		22 mm		3000 g

Product: 4532-CL

a	50-160 mm	b	300 mm	C	105-220 mm
	6.5 to		65 kN	A	4 mm
B	16 mm	C	35 mm	D	25 mm
	G 1/2"x14x210 mm		22 mm		3870 g

Follow the Fish!



Product: 4532-D

a	60-200 mm	b	150 mm	c	120-270 mm
	6.5 to		65 kN	A	4 mm
B	16 mm	C	35 mm	D	25 mm
	G 1/2"x14x210 mm		22 mm		3200 g

Product: 4532-E

a	80-250 mm	b	200 mm	c	160-330 mm
	11 to		110 kN	A	5 mm
B	25 mm	C	54 mm	D	35 mm
	G 3/4"x14x265 mm		27 mm		7060 g

Product: 4532-F

a	80-350 mm	b	200 mm	c	160-420 mm
	11 to		110 kN	A	5 mm
B	25 mm	C	54 mm	D	35 mm
	G 3/4"x14x265 mm		27 mm		8000 g

Product: 4532-G

a	110-520 mm	b	200 mm	c	195-600 mm
	13 to		130 kN	A	5 mm
B	25 mm	C	54 mm	D	35 mm
	G 3/4"x14x265 mm		27 mm		14000 g

Product: 4532-G-SO

a	110-520 mm	b	300 mm	c	195-600 mm
	13 to		130 kN	A	5 mm
B	25 mm	C	54 mm	D	35 mm
	G 3/4"x14x265 mm		27 mm		14000 g

Product: 4532-H

a	170-640 mm	b	225 mm	c	260-715 mm
	18 to		180 kN	A	10 mm
B	33 mm	C	55 mm	D	50 mm
	G 1"x11x305 mm		36 mm		23000 g

