



7455

Mechanical Adjustable Torque Click Wrench with Marked Scale and Fixed Ratchet Head

PRODUCT DETAILS

- Dual scales in N·m/ft.lb and N·m/in.lb (sizes 5-25 N·m)
- Range covering between 1 and 1,000 N·m /11 in.lb and 701 ft.lb torque values
- Can be used clockwise or anticlockwise
- Controlled torque application events to ±4% CW and ACW (7455-5 ±6%)
- Clicking system triggers a tactile and audible signal
- Fixed ratchet heads with 24-36 teeth from ¼ to 1" square drives (1/4" to 1/2" with quick release)
- All-metal rugged, durable wrench with sealed mechanism
- Anti-slip knurled metal handle resistant to impact, pressure and chemicals
- Sizes 5 to 340 N·m come in a semi-transparent tube with eurohole
- Sizes above in plastic blow mould case
- All wrenches come with a factory declaration of conformity according to ISO 6789-1:2017
- Made in USA

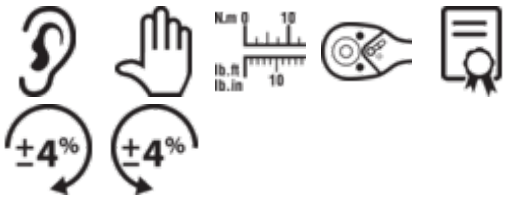

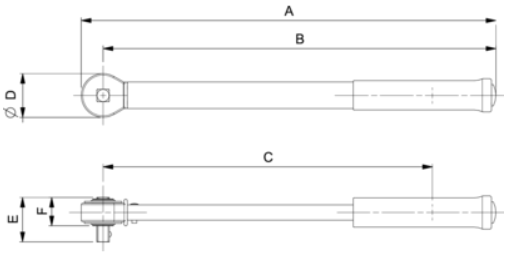

Follow the Fish!



Contact: info@bahco.com / www.bahco.com

PRODUCT ATTRIBUTES

Product: 7455-5

N·m	1-5 N·m	lbf·in	11-42 lbf·in	lbf·ft	
	1/4 in		0.05 N·m		0.4 lbf·in
lbf·ft		A	258 mm	B	245 mm
C	200 mm	D	27 mm	E	24 mm
F	16 mm	kg	0.386 kg		

Product: 7455-15

N·m	3-15 N·m	lbf·in	31-128 lbf·in	lbf·ft	
	1/4 in		0.1 N·m		0.89 lbf·in
lbf·ft		A	258 mm	B	245 mm
C	200 mm	D	27 mm	E	24 mm
F	16 mm	kg	0.409 kg		

Product: 7455-20

N·m	4-20 N·m	lbf·in	40-173 lbf·in	lbf·ft	
	1/4 in		0.1 N·m		0.89 lbf·in
lbf·ft		A	258 mm	B	245 mm
C	200 mm	D	27 mm	E	24 mm
F	19 mm	kg	0.386 kg		

Product: 7455-25

N·m	5-25 N·m	lbf·in	49-217 lbf·in	lbf·ft	
	1/4 in		0.1 N·m		0.89 lbf·in
lbf·ft		A	286 mm	B	273 mm
C	226 mm	D	27 mm	E	24 mm
F	16 mm	kg	0.410 kg		

Product: 7455-60

N·m	12-60 N·m	lbf·in		lbf·ft	9.2-42.4 lbf·ft
	3/8 in		0.5 N·m		
lbf·ft	0.3 lbf·ft	A	393 mm	B	376 mm
C	326 mm	D	34 mm	E	30 mm
F	20 mm	kg	1.135 kg		

Product: 7455-100

N·m	20-100 N·m	lbf·in		lbf·ft	16.6-71.9 lbf·ft
	3/8 in		0.5 N·m		
lbf·ft	0.6 lbf·ft	A	400 mm	B	383 mm
C	333 mm	D	34 mm	E	30 mm
F	20 mm	kg	1.135 kg		

Product: 7455-100A

N·m	20-100 N·m	lbf·in		lbf·ft	16.6-71.9 lbf·ft
	1/2 in		0.5 N·m		
lbf·ft	0.65 lbf·ft	A	414 mm	B	395 mm
C	345 mm	D	43 mm	E	41 mm
F	26 mm	kg	1.290 kg		

Product: 7455-200

N·m	40-200 N·m	lbf·in		lbf·ft	37-140 lbf·ft
	1/2 in		2 N·m		
lbf·ft	1.5 lbf·ft	A	474 mm	B	455 mm
C	405 mm	D	43 mm	E	41 mm
F	26 mm	kg	1.430 kg		

Product: 7455-300

N·m	60-300 N·m	lbf·in		lbf·ft	52-314 lbf·ft
	1/2 in		2 N·m		
lbf·ft	1.5 lbf·ft	A	483 mm	B	465 mm
C	415 mm	D	43 mm	E	41 mm
F	26 mm	kg	1.440 kg		

Product: 7455-340

N·m	68-340 N·m	lbf·in		lbf·ft	52-243 lbf·ft
	1/2 in		2 N·m		
lbf·ft	1.5 lbf·ft	A	613 mm	B	595 mm
C	545 mm	D	43 mm	E	41 mm
F	26 mm	kg	1.680 kg		

Product: 7455-500

N·m	100-500 N·m	lbf·in		lbf·ft	83-359.6 lbf·ft
	3/4 in		5 N·m		
lbf·ft	1.8 lbf·ft	A	870 mm	B	830 mm
C	780 mm	D	65 mm	E	53 mm
F	29 mm	kg	4.370 kg		

Product: 7455-800

N·m	160-800 N·m	lbf·in		lbf·ft	129-572 lbf·ft
	3/4 in		5 N·m		
lbf·ft	3.7 lbf·ft	A	1047 mm	B	1015 mm
C	970 mm	D	65 mm	E	53 mm
F	29 mm	kg	5.310 kg		

Product: 7455-1000

N·m	200-1000 N·m	lbf·in		lbf·ft	184-701 lbf·ft
	1 in		10 N·m		
lbf·ft	7.4 lbf·ft	A	1055 mm	B	1010 mm
C	970 mm	D	78 mm	E	68 mm
F	38 mm	kg	6.350 kg		