BAHCO




7400SM

3/8" Square Drive Sockets with Metric Hex Profile and High Polished Finish

PRODUCT DETAILS

- Knurled shank for finger turning of free running fasteners
- Not suitable for machine operation
- Highly polished finish
- High-performance alloy steel
- Less wear of fastener thanks to Dynamic-Drive™ profile
- Maximum load distribution and torque from the additional flank area
- Standards: ISO 2725/1174 and DIN 3124/3120



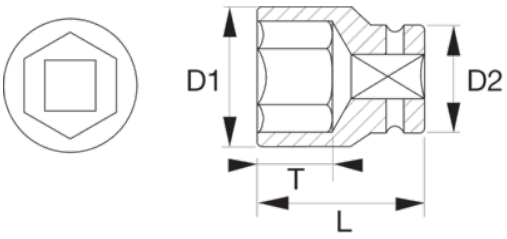

Follow the Fish!

PRODUCT ATTRIBUTES

Product	⬡	L	D1	D2	T	g
7400SM-6	6 mm	25.5 mm	9.3 mm	17 mm	7 mm	10 g
7400SM-7	7 mm	25.5 mm	10.9 mm	17 mm	7 mm	40 g
7400SM-8	8 mm	25.5 mm	11.8 mm	17 mm	8 mm	16 g
7400SM-9	9 mm	25.5 mm	13.4 mm	17 mm	8 mm	19 g
7400SM-10	10 mm	25.5 mm	14.6 mm	17 mm	8 mm	19 g
7400SM-11	11 mm	25.5 mm	15.9 mm	17 mm	8 mm	20 g
7400SM-12	12 mm	25.5 mm	17 mm	17 mm	8.5 mm	22 g
7400SM-13	13 mm	25.5 mm	18.4 mm	17 mm	8.5 mm	22 g
7400SM-14	14 mm	27 mm	19.6 mm	18.4 mm	13 mm	23 g
7400SM-15	15 mm	27 mm	20.9 mm	19 mm	13 mm	25 g
7400SM-16	16 mm	26 mm	22 mm	20 mm	13 mm	40 g
7400SM-17	17 mm	27 mm	24.5 mm	20 mm	13 mm	30 g
7400SM-18	18 mm	27 mm	24.5 mm	18 mm	13 mm	40 g
7400SM-19	19 mm	29 mm	25.6 mm	21 mm	14 mm	40 g
7400SM-20	20 mm	29 mm	26.8 mm	24 mm	14 mm	63 g
7400SM-21	21 mm	29 mm	27.9 mm	24 mm	14 mm	73 g
7400SM-22	22 mm	31 mm	29.6 mm	26 mm	16 mm	78 g
SB7400SM-6	6 mm	25.5 mm	9.3 mm	17 mm	7 mm	15 g
SB7400SM-7	7 mm	25.5 mm	10.9 mm	17 mm	7 mm	15 g
SB7400SM-8	8 mm	25.5 mm	11.8 mm	17 mm	8 mm	16 g
SB7400SM-9	9 mm	25.5 mm	13.4 mm	17 mm	8 mm	19 g
SB7400SM-10	10 mm	25.5 mm	14.6 mm	17 mm	8 mm	19 g
SB7400SM-11	11 mm	25.5 mm	17 mm	17 mm	8 mm	20 g
SB7400SM-12	12 mm	25.8 mm	16.6 mm	17.3 mm	8.5 mm	22 g
SB7400SM-13	13 mm	25.8 mm	18 mm	17.3 mm	8.5 mm	120 g
SB7400SM-14	14 mm	26.2 mm	19.6 mm	18 mm	13 mm	23 g
SB7400SM-15	15 mm	27.8 mm	20.4 mm	19 mm	13 mm	25 g
SB7400SM-16	16 mm	28.3 mm	21.1 mm	20 mm	13 mm	25 g
SB7400SM-17	17 mm	25 mm	22.8 mm	20 mm	13 mm	50 g
SB7400SM-18	18 mm	29.5 mm	24.3 mm	21 mm	13 mm	30 g
SB7400SM-19	19 mm	29 mm	25.6 mm	21 mm	14 mm	40 g
SB7400SM-20	20 mm	29 mm	26.8 mm	24 mm	14 mm	63 g
SB7400SM-21	21 mm	29 mm	27.9 mm	24 mm	14 mm	73 g
SB7400SM-22	22 mm	31 mm	29.6 mm	26 mm	16 mm	78 g