BAHCO




7805DM

1/2" Square Drive Deep Sockets with Metric Bi-Hex Profile

PRODUCT DETAILS

- Knurled shank for finger turning of free running fasteners
- Not suitable for machine operation or power tools
- Highly polished finish
- High-performance alloy steel
- Less wear of the fastener thanks to Dynamic-Drive™ profile
- Maximum load distribution and torque from the additional flank area
- Standards: ISO 2725-1/1174-1 and DIN 3120

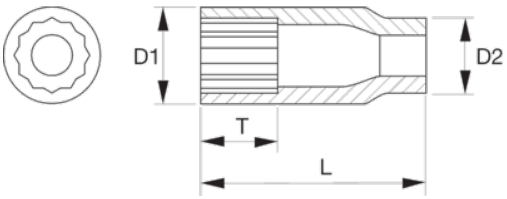

Follow the Fish!

PRODUCT ATTRIBUTES

Product	⌀	L	D1	D2	T	g
7805DM-10	10 mm	82.6 mm	14.9 mm		7.1 mm	95 g
7805DM-12	12 mm	82.6 mm	17.8 mm	22.5 mm	8.9 mm	100 g
7805DM-13	13 mm	82.6 mm	18.9 mm	22.5 mm	9.7 mm	120 g
7805DM-14	14 mm	82.6 mm	20.4 mm	22.5 mm	10.2 mm	135 g
7805DM-15	15 mm	82.6 mm	21.6 mm	22.5 mm	10.2 mm	150 g
7805DM-16	16 mm	82.6 mm	22.9 mm	22.5 mm	11.4 mm	130 g
7805DM-17	17 mm	82.6 mm	24.1 mm	22.5 mm	12.2 mm	160 g
7805DM-18	18 mm	82.6 mm	25.2 mm	23.4 mm	13.5 mm	164 g
7805DM-19	19 mm	82.6 mm	26.3 mm	22.5 mm	13.7 mm	180 g
7805DM-21	21 mm	82.6 mm	28.3 mm	24.3 mm	16.5 mm	200 g
7805DM-22	22 mm	82.6 mm	29.9 mm	25.9 mm	17.8 mm	220 g
7805DM-23	23 mm	82.6 mm	31.6 mm	27.7 mm	17.8 mm	260 g
7805DM-24	24 mm	82.6 mm	32.3 mm	28.5 mm	18.3 mm	270 g
7805DM-26	26 mm	82.6 mm	34.7 mm	30.7 mm	18.5 mm	320 g
7805DM-27	27 mm	82.6 mm	36.2 mm	32.2 mm	19.1 mm	340 g
7805DM-30	30 mm	82.6 mm	40.9 mm	37.2 mm	20.1 mm	450 g
7805DM-32	32 mm	82.6 mm	42.4 mm	38.7 mm	24.9 mm	470 g
7805DM-34	34 mm	82.6 mm	42.4 mm	38.7 mm	24.9 mm	470 g
SB7805DM-10	10 mm	82.6 mm	14.9 mm	22.5 mm	7.1 mm	95 g
SB7805DM-12	12 mm	82.6 mm	17.9 mm	22.5 mm	8.9 mm	103 g
SB7805DM-13	13 mm	82.6 mm	17.9 mm	22.5 mm	9.7 mm	109 g
SB7805DM-14	14 mm	82.6 mm	20.4 mm	22.5 mm	10.2 mm	140 g
SB7805DM-15	15 mm	82.6 mm	21.6 mm	22.5 mm	10.2 mm	160 g
SB7805DM-16	16 mm	82.6 mm	22.9 mm	22.5 mm	11.4 mm	150 g
SB7805DM-17	17 mm	82.6 mm	24.1 mm	22.5 mm	12.2 mm	160 g
SB7805DM-18	18 mm	82.6 mm	25.2 mm	22.5 mm	13.5 mm	170 g
SB7805DM-19	19 mm	84.6 mm	26.3 mm	22.5 mm	13.7 mm	170 g
SB7805DM-21	21 mm	82.6 mm	28.3 mm	24.3 mm	16.5 mm	200 g
SB7805DM-22	22 mm	82.6 mm	29.9 mm	25.9 mm	17.8 mm	220 g
SB7805DM-23	23 mm	82.6 mm	31 mm	27 mm	17.8 mm	260 g
SB7805DM-24	24 mm	82.6 mm	32 mm	28 mm	18.3 mm	270 g
SB7805DM-26	26 mm	82.6 mm	34.7 mm	30.7 mm	18.5 mm	310 g
SB7805DM-27	27 mm	82.6 mm	36.2 mm	32.2 mm	19.1 mm	340 g
SB7805DM-30	30 mm	82.6 mm	40.9 mm	36.4 mm	20.1 mm	450 g
SB7805DM-32	32 mm	82.6 mm	40.9 mm	38 mm	24.9 mm	450 g
SB7805DM-34	34 mm	82.6 mm	42.4 mm	38.7 mm	24.9 mm	470 g