




7800TORX-E

1/2" Square Drive Sockets with TORX® Profile



PRODUCT DETAILS

- Knurled shank for finger turning of free running fasteners
- Not suitable for machine operation or power tools
- Highly polished finish
- High-performance alloy steel
- Standards: ISO 2725/1174 and DIN 3124/3120

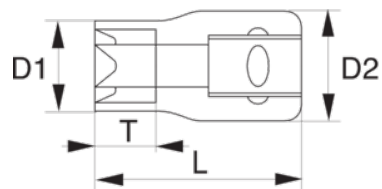

Follow the Fish!



PRODUCT ATTRIBUTES

Product		L	D1	D2	T		
7800TORX-E8	E8	38 mm	10.7 mm	22 mm	6 mm	-	60 g
7800TORX-E10	E10	38 mm	14.2 mm		7.1 mm	M8	60 g
7800TORX-E11	E11	38 mm	15.4 mm	22 mm	7.6 mm	-	70 g
7800TORX-E12	E12	38 mm	15.4 mm	22 mm	8.2 mm	M8+ M10	60 g
7800TORX-E14	E14	38 mm	16.6 mm	22 mm	9.5 mm	M10+M12	80 g
7800TORX-E16	E16	38 mm	19.1 mm	22 mm	10.8 mm	-	60 g
7800TORX-E18	E18	38 mm	20.4 mm	22 mm	12 mm	M12+M14	70 g
7800TORX-E20	E20	38 mm	22.9 mm	22.9 mm	13.3 mm	M14+M16	80 g
7800TORX-E24	E24	38 mm	27.9 mm	25 mm	16 mm	M18+M20	90 g
SB7800TORX-E8	E8	36 mm	10.7 mm	22 mm	6 mm	-	80 g
SB7800TORX-E10	E10	38 mm	14.2 mm		7.1 mm	M8	70 g
SB7800TORX-E11	E11	38 mm	15.4 mm	22 mm	7.6 mm	-	60 g
SB7800TORX-E12	E12	38 mm	13.5 mm	22 mm	8.2 mm	M8+M10	70 g
SB7800TORX-E14	E14	38 mm	16.6 mm	22 mm	9.5 mm	M10+M12	60 g
SB7800TORX-E16	E16	38 mm	19.1 mm	22 mm	10.8 mm	-	70 g
SB7800TORX-E18	E18	38 mm	20.4 mm	22 mm	12 mm	M12+M14	60 g
SB7800TORX-E20	E20	36 mm	22.9 mm	22.9 mm	13.3 mm	M14+M16	80 g
SB7800TORX-E24	E24	37 mm	27.9 mm	25 mm	16 mm	M18+M20	100 g

Follow the Fish!

