BAHCO




## 7800TORX-E

# 1/2" Square Drive Sockets with TORX® Profile

## PRODUCT DETAILS

- Knurled shank for finger turning of free running fasteners
- Not suitable for machine operation or power tools
- Highly polished finish
- High-performance alloy steel
- Standards: ISO 2725/1174 and DIN 3124/3120



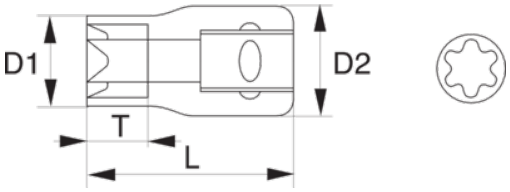


**Follow the Fish!**

PRODUCT ATTRIBUTES

| Product | | L | D1 | D2 | T | | g |
|---|---|---|---|---|---|---|---|
| 7800TORX-E8 | E8 | 38 mm | 10.7 mm | 22 mm | 6 mm | - | 60 g |
| 7800TORX-E10 | E10 | 38 mm | 14.2 mm | | 7.1 mm | M8 | 60 g |
| 7800TORX-E11 | E11 | 38 mm | 15.4 mm | 22 mm | 7.6 mm | - | 70 g |
| 7800TORX-E12 | E12 | 38 mm | 15.4 mm | 22 mm | 8.2 mm | M8+ M10 | 60 g |
| 7800TORX-E14 | E14 | 38 mm | 16.6 mm | 22 mm | 9.5 mm | M10+M12 | 80 g |
| 7800TORX-E16 | E16 | 38 mm | 19.1 mm | 22 mm | 10.8 mm | - | 60 g |
| 7800TORX-E18 | E18 | 38 mm | 20.4 mm | 22 mm | 12 mm | M12+M14 | 70 g |
| 7800TORX-E20 | E20 | 38 mm | 22.9 mm | 22.9 mm | 13.3 mm | M14+M16 | 80 g |
| 7800TORX-E24 | E24 | 38 mm | 27.9 mm | 25 mm | 16 mm | M18+M20 | 90 g |
| SB7800TORX-E8 | E8 | 36 mm | 10.7 mm | 22 mm | 6 mm | - | 80 g |
| SB7800TORX-E10 | E10 | 38 mm | 14.2 mm | | 7.1 mm | M8 | 70 g |
| SB7800TORX-E11 | E11 | 38 mm | 15.4 mm | 22 mm | 7.6 mm | - | 60 g |
| SB7800TORX-E12 | E12 | 38 mm | 13.5 mm | 22 mm | 8.2 mm | M8+M10 | 70 g |
| SB7800TORX-E14 | E14 | 38 mm | 16.6 mm | 22 mm | 9.5 mm | M10+M12 | 60 g |
| SB7800TORX-E16 | E16 | 38 mm | 19.1 mm | 22 mm | 10.8 mm | - | 70 g |
| SB7800TORX-E18 | E18 | 38 mm | 20.4 mm | 22 mm | 12 mm | M12+M14 | 60 g |
| SB7800TORX-E20 | E20 | 36 mm | 22.9 mm | 22.9 mm | 13.3 mm | M14+M16 | 80 g |
| SB7800TORX-E24 | E24 | 37 mm | 27.9 mm | 25 mm | 16 mm | M18+M20 | 100 g |